


# Managent menu > Group

This menu is used in conjunction with the **Group Management** window. See [Admintool](#). If some of the buttons are grayed out, it means that you need to select a group in the Group Management window.

## Propriétés des Groupes

Lorsque nous créons ou modifions un groupe, nous avons accès à l'ensemble de ses propriétés :

### Global

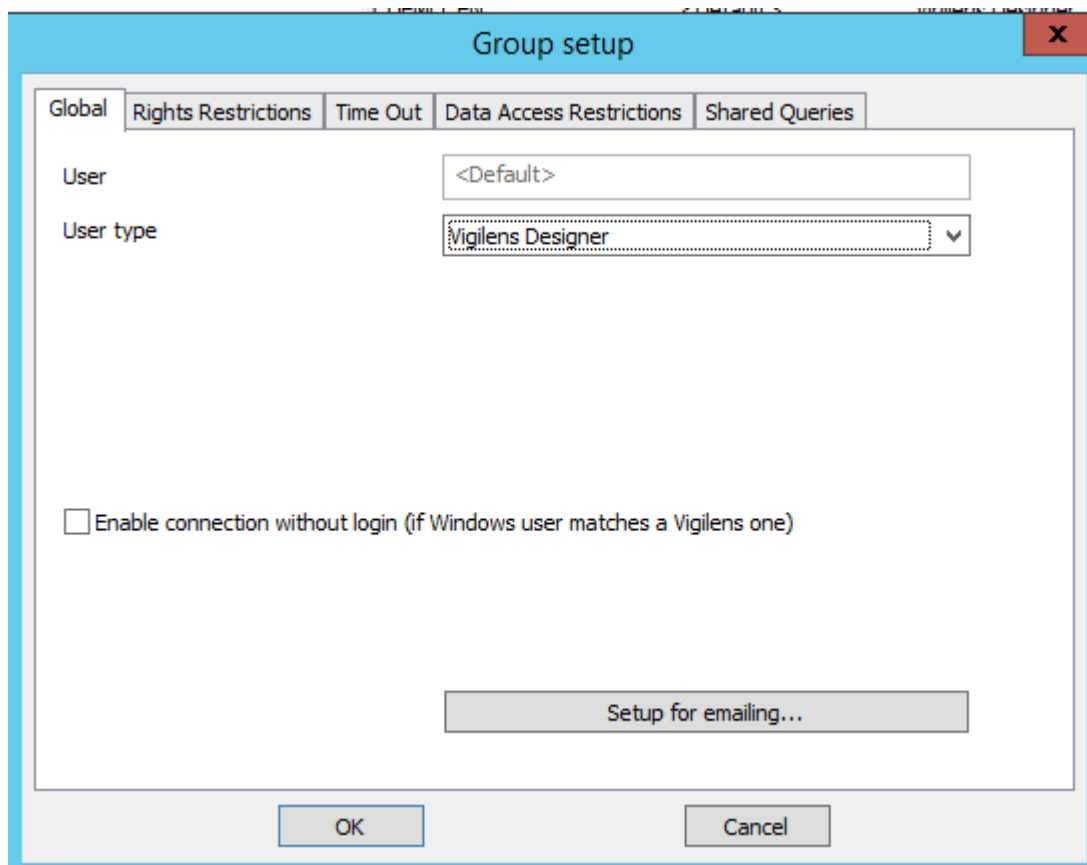

The screenshot shows a dialog box titled "Group setup" with a close button (X) in the top right corner. The dialog has five tabs: "Global", "Rights Restrictions", "Time Out", "Data Access Restrictions", and "Shared Queries". The "Global" tab is active. It contains the following fields and controls:

- User:** A text box containing "<Default>".
- User type:** A dropdown menu with "Vigilens Designer" selected.
- Enable connection without login (if Windows user matches a Vigilens one):** An unchecked checkbox.
- Setup for emailing...:** A button located below the checkbox.
- OK** and **Cancel** buttons are located at the bottom of the dialog.

### Name

Name of the group, knowing that the default group cannot be renamed.

### User type

there are 2 possible types of users.

- Vigilens Viewer / Web: only consultation of existing queries
- Vigilens Designer: possibility to create new queries.



The available types depend on the license.

## Windows connexion

Allows to launch Vigilens without the login window being displayed, if the Windows user name corresponds to the Vigilens user name.

## Setup for emailing

You can also assign a different mail server and/or a different sender name for this group than the default server.

The mail server can be set at the user level, in which case it takes precedence over what is set at the group level.



Specifying mail settings at the user level allows you to have a personalized return address.

The screenshot shows a dialog box titled "Email Setup" with a close button (X) in the top right corner. Inside the dialog, there are two checked checkboxes: "Use default server (smtp.office365.com)" and "Use default sender (support@vigilens.fr)". At the bottom of the dialog, there are two buttons: "OK" and "Cancel".

Unchecking one or both checkboxes opens the entry to the parameters specific to this group.

**Email Setup** [X]

Use default server (smtp.office365.com)

SMTP

SMTP Server for outgoing mail

SMTP Server requires authentication

User Name

Password

SMTP Server Port

Default encryption

Encryption

None  TLS  SSL

Use default sender (support@vigilens.fr)

OK Cancel

**Email Setup** [X]

Use default server (smtp.office365.com)

Use default sender (support@vigilens.fr)


Sender

Sender address


Copy for sender

OK Cancel

## Restriction of rights

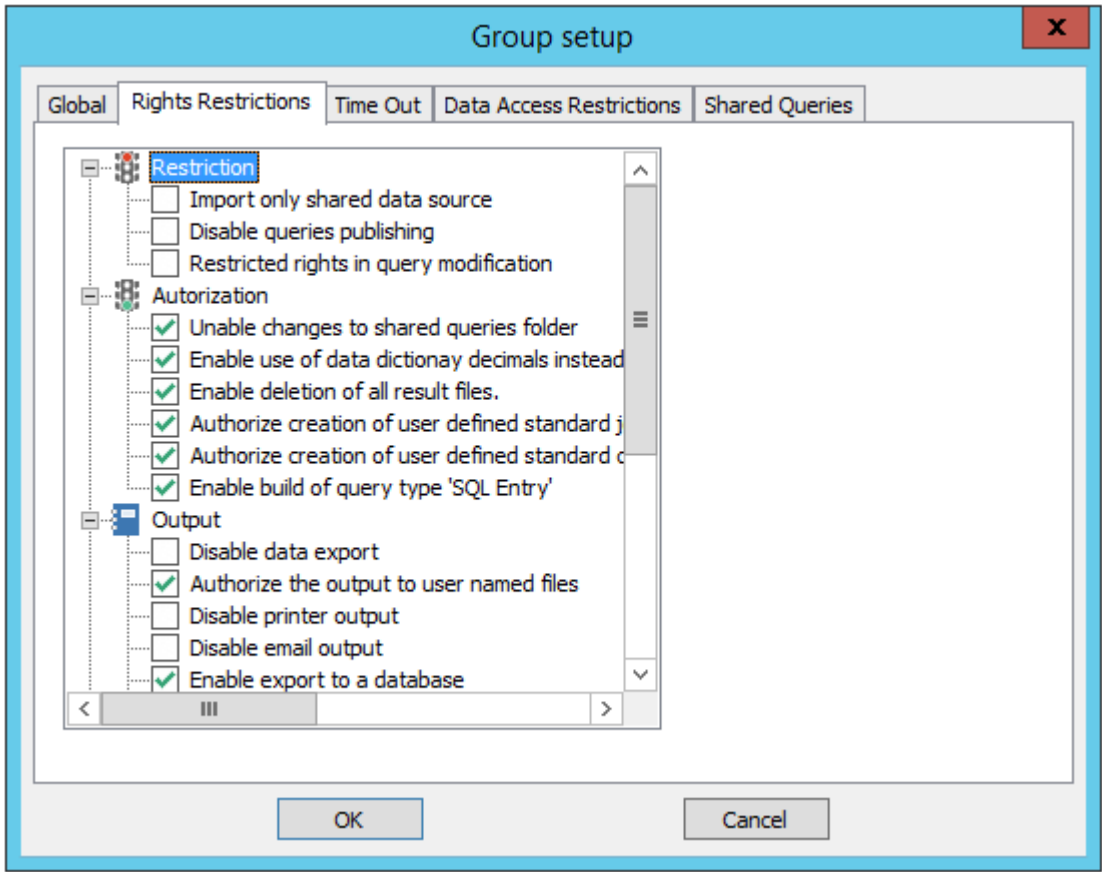

\* This is where you define which Vigilens applications a group can access. You can see that for each right, there is a contextual help in the top right corner.

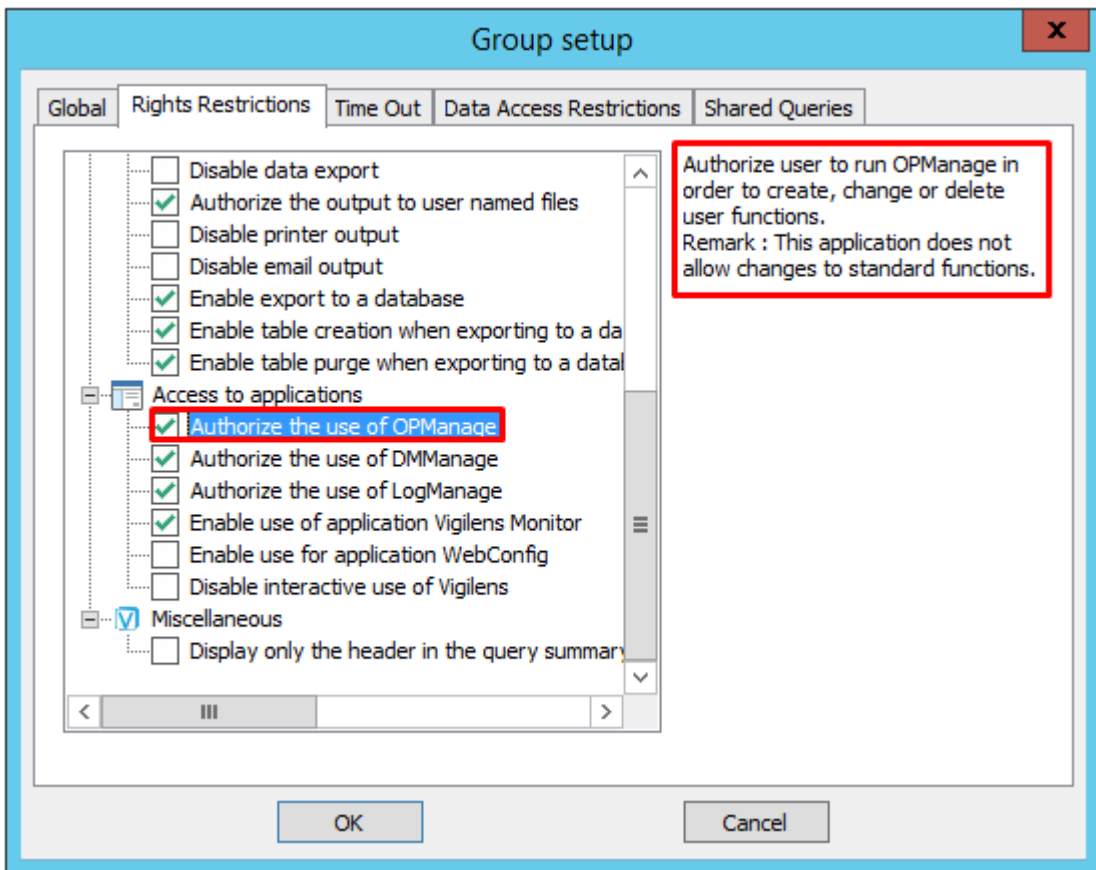



If one of these boxes is checked at the group level, it will also be checked at the group user level and will not be uncheckable.



recupérer les libellés en anglais de Denis

## Time Out

The screenshot shows a 'Group setup' dialog box with a blue title bar and a close button (X) in the top right corner. It has five tabs: 'Global', 'Rights Restrictions', 'Time Out', 'Data Access Restrictions', and 'Shared Queries'. The 'Time Out' tab is active. It contains two main sections, each with a checked 'Enable time out' checkbox and a time picker. The first section is 'SQL run time out' with a time picker set to 0 h, 3', and 0". The second section is 'Total time out (SQL run + Data download and display)' with a time picker set to 0 h, 4', and 0". At the bottom of the dialog are 'OK' and 'Cancel' buttons.

There are 2 times out:

- the first one is purely relative to the database: it is the maximum time between the submission by Vigilens of the request to the SQL server and the end of the execution. This time out is managed by the database itself.
- the second one is managed by Vigilens: compared to the first one, it also takes into account the data extraction time.



These notions of time-out can be defined at different levels:

- group
- user

- query




These times must necessarily be smaller and smaller when switching from group to user and then user to query.



Because SQL time out is managed at the database system level, it is not available on all platforms.

## Data access restriction

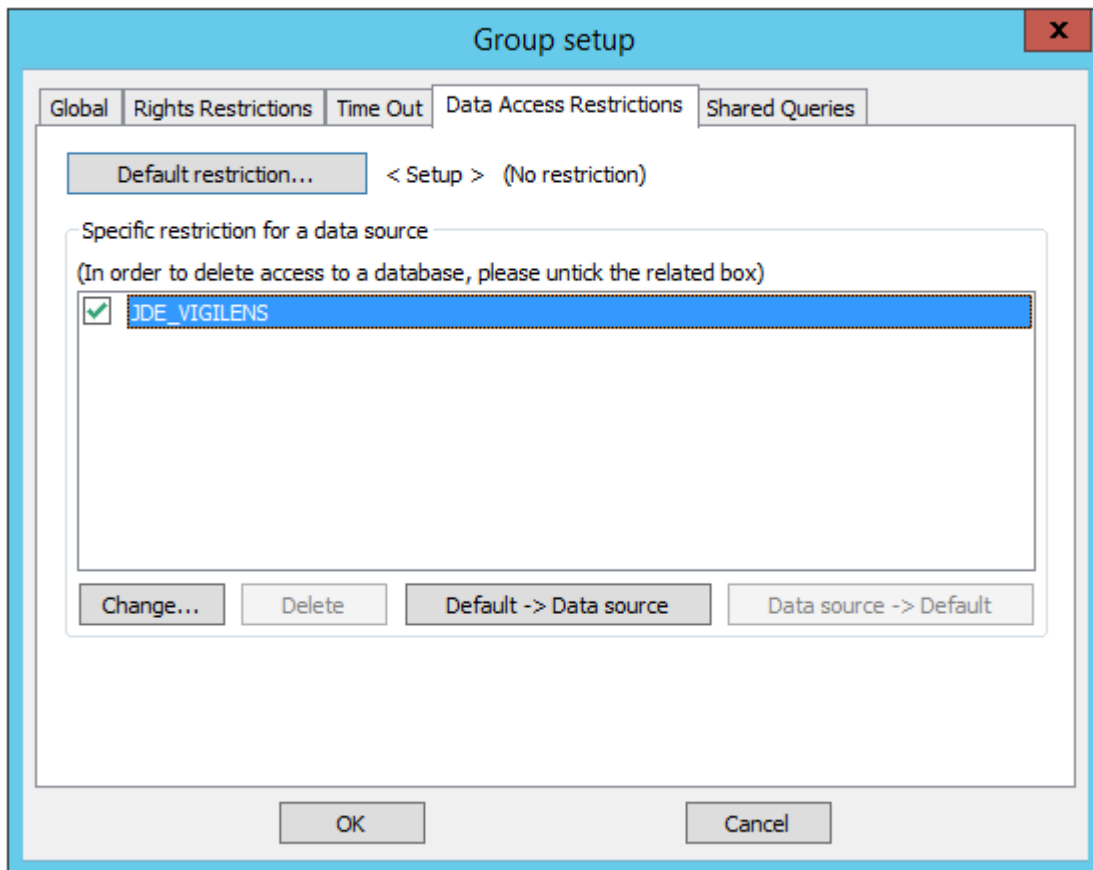

It may be useful to block certain groups from accessing certain sensitive company information. Vigilens can impose restrictions on :

- Environments
- Tables (for JDE/World type sources)
- Aliases (for JDE/World sources)
- Fields
- Values






The button Default restrictions... gives you access to settings that are valid for all data sources that do not have specific settings. The sequence of the screens is similar in every way to the settings for a particular data source.



Generally speaking, all of the following restrictions work on either as black list or white list system: either you make explicit which items are prohibited and everything else is allowed, or you make explicit which items are allowed and everything else is prohibited. Black list/White list operation is defined at group level and cannot be changed at user level.

you can:


- prevent/allow access to environments, for JDE/World data sources

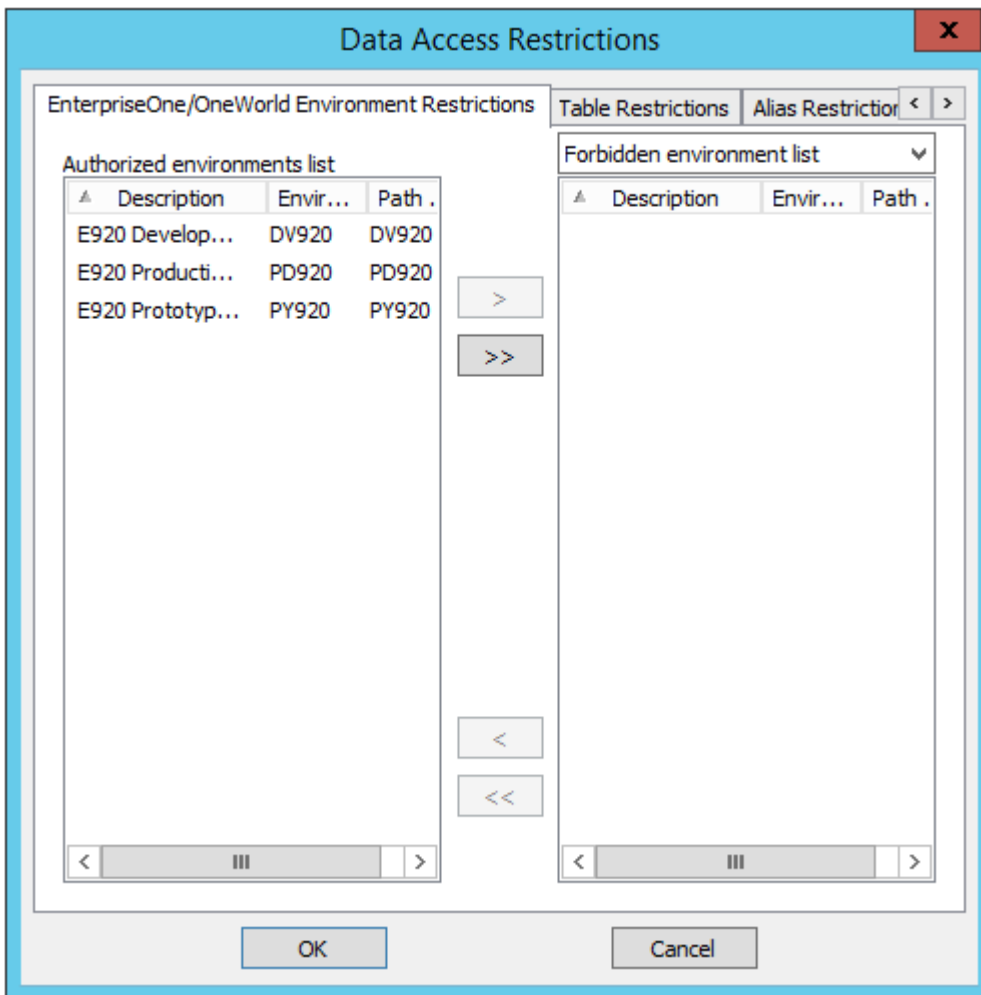


- prevent/allow consultation of a particular table



- prevent/allow access to an alias (JDE/World)

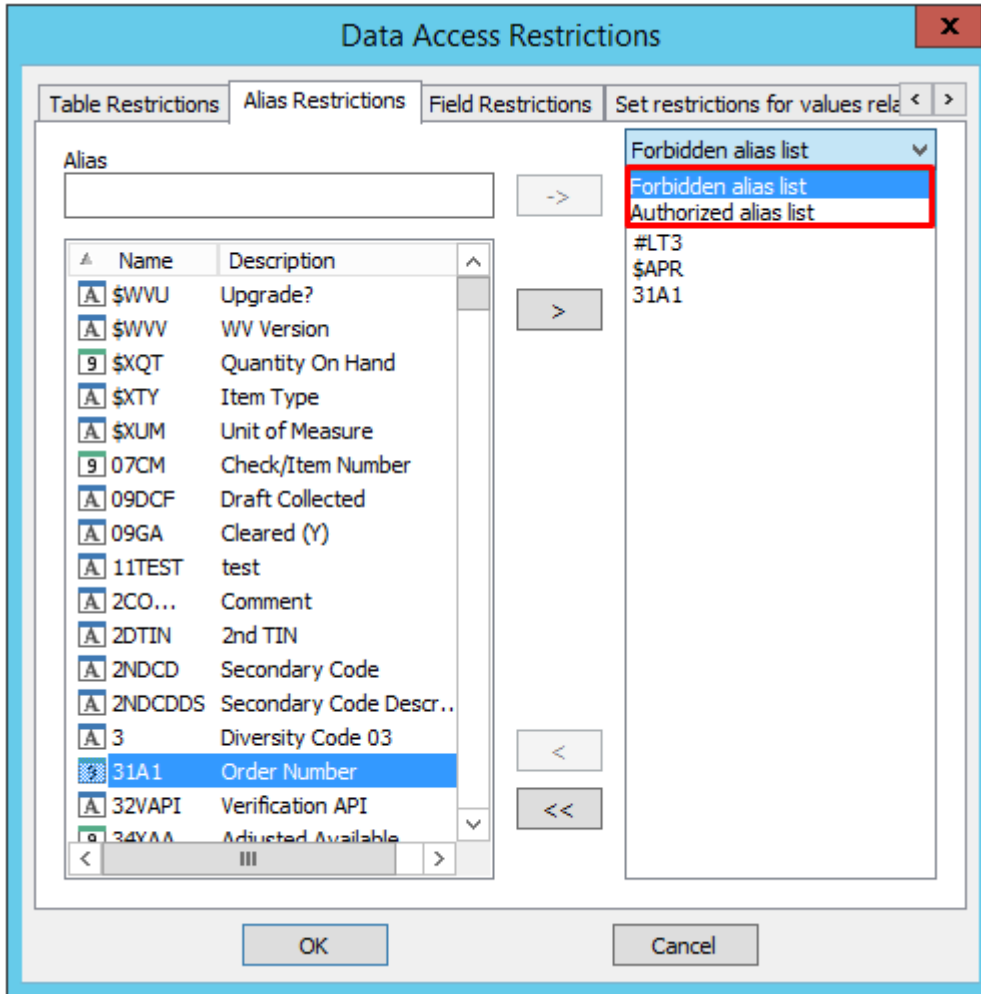

- prevent/allow access to define table column

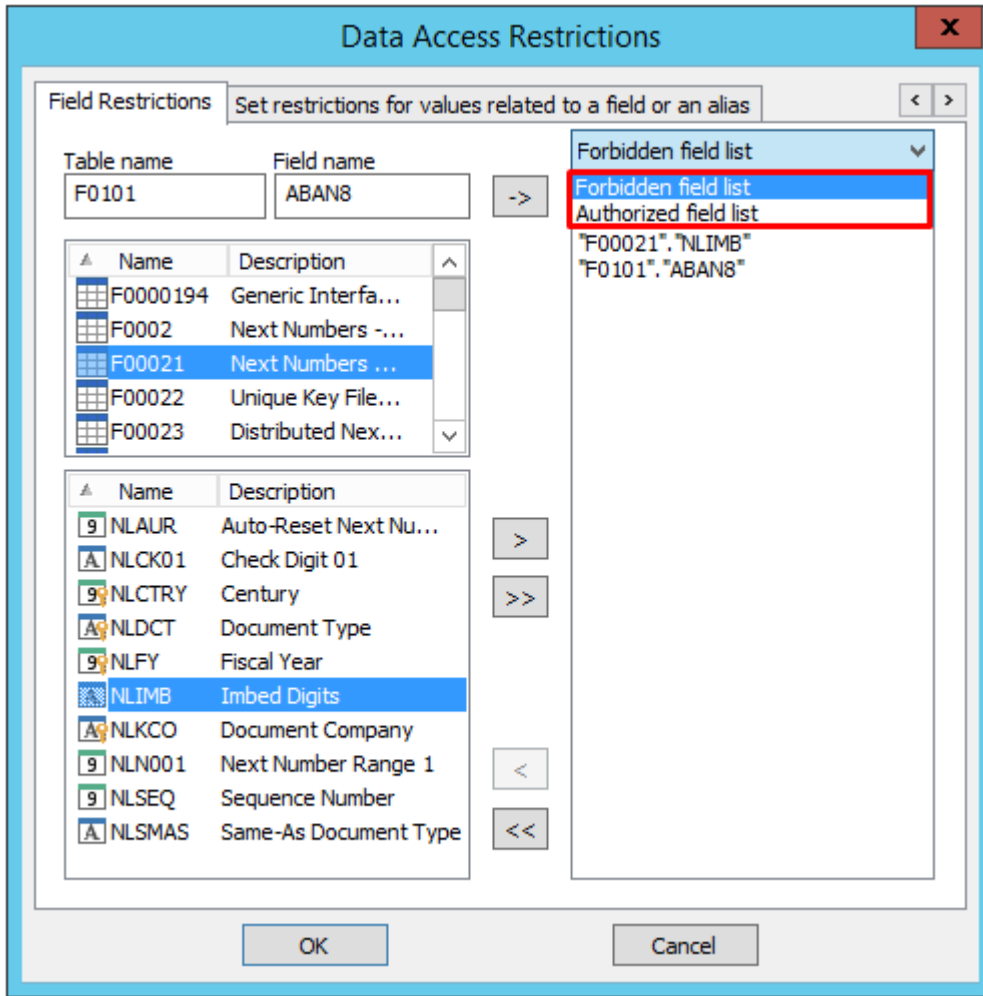

- prevent/allow the display of certain table rows according to criteria on a table column. The criterion can be a single value, a range of values, or a list of values.

**Data Access Restrictions**

Field Restrictions Set restrictions for values related to a field or an alias

Use JDE security related to this user

Condition for forbidden data display

**Set a condition for a value related to a field or an alias**

Enter an alias  Enter a field

Field to check

Enter a field without wizard

Table name: F0101 Field name: ABAN8

Enter a field with wizard

Name	Description
F0000194	Generic Interface Table ...
F0002	Next Numbers - Automatic
F00021	Next Numbers by Comp...
F00022	Unique Key File - Next A...
F00023	Distributed Next Number...
F0004	User Defined Code Types
F0004D	User Defined Codes - Alt...
F0005	User Defined Code Values
F0005D	User Defined Codes - Alt...

Name	Description
NNCK01	Check Digit 01
NNCK02	Check Digit 02
NNCK03	Check Digit 03
NNCK04	Check Digit 04
NNCK05	Check Digit 05
NNCK06	Check Digit 06
NNCK07	Check Digit 07
NNCK08	Check Digit 08

Value for forbidden display

Value equal to the following string : [F0002].[NNCK01] =

**[F0002].[NNCK01]**


Single value Range of values List of values

0

3




If the data source is JDE/World, we have in addition the choice to use the JDE security associated with a user and one of his roles (or all roles with the value “\*ALL”).

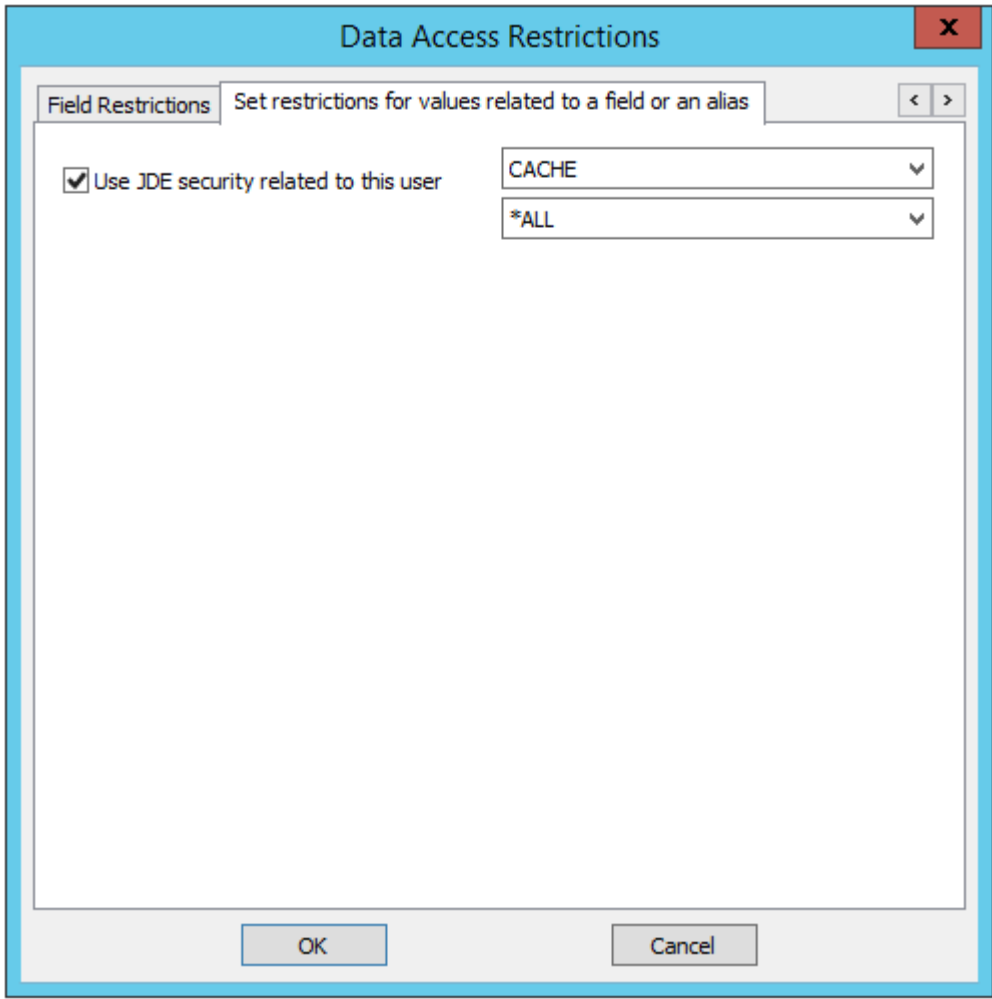

## Shared Queries


This setting allows you to :


- Define the place(s) where the user can deposit the queries he wants to share. The user has access to the entire tree structure of the specified directories.
- Define the shared queries it can use

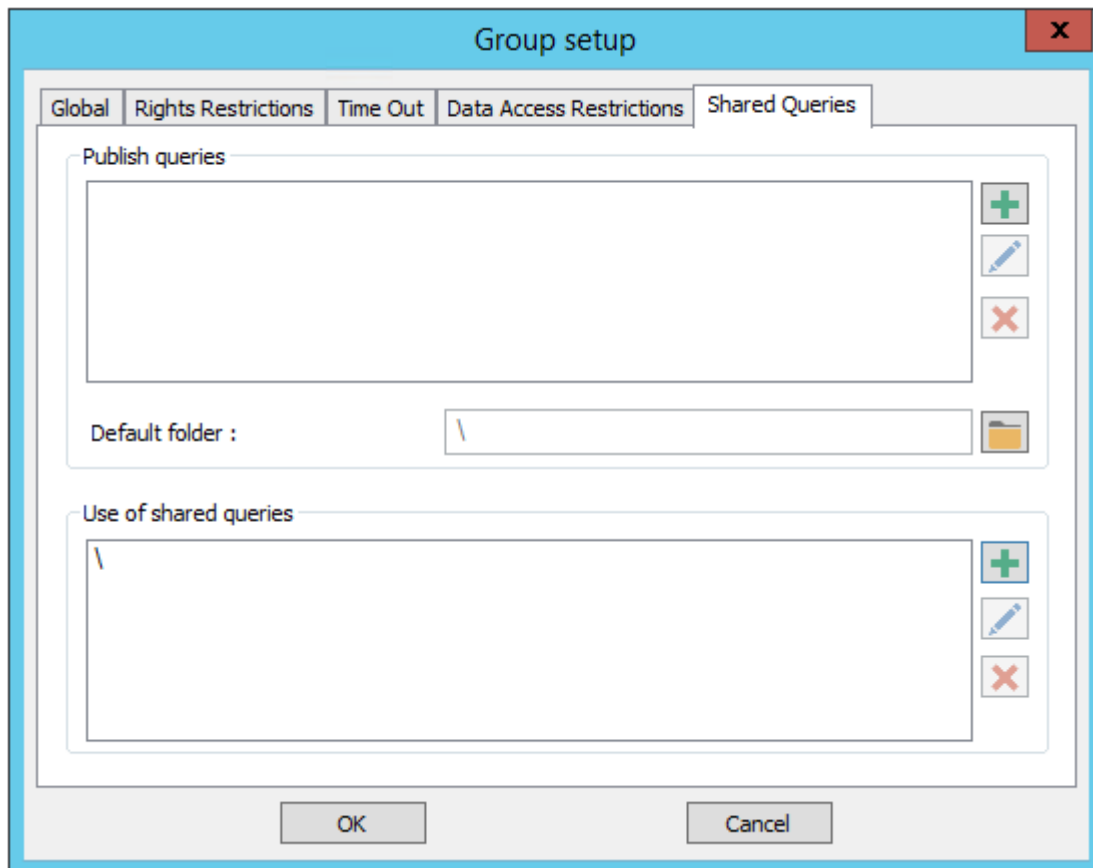

- Publish queries: list of shared folders accessible when publishing queries
  - Default folder: proposed by default when publishing queries
- Use of shared queries: list of shared folders accessible via the web interface

## Change Language

 Change user language

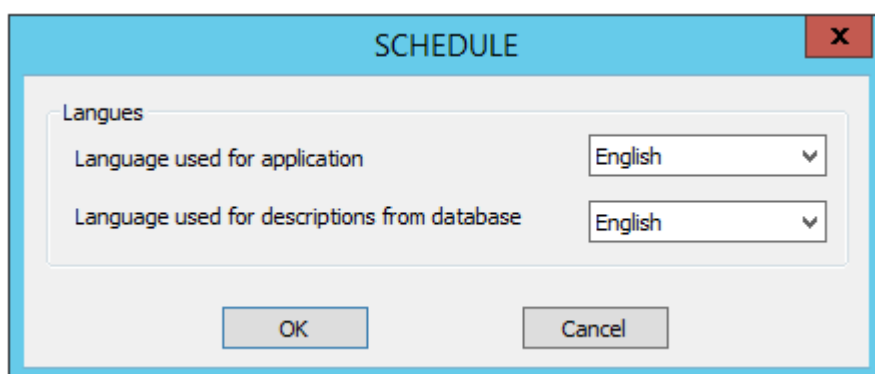

From: <https://vigilens.wiki/dokuwiki/> - **Vigilens Reporting Knowledge Garden**

Permanent link: [https://vigilens.wiki/dokuwiki/doku.php?id=en:v8\\_0\\_0:admintool:menus:gestion:groupe:start&rev=1595925281](https://vigilens.wiki/dokuwiki/doku.php?id=en:v8_0_0:admintool:menus:gestion:groupe:start&rev=1595925281)

Last update: **2020/07/28 10:34**

