


Managent menu > Group

This menu is used in conjunction with the **Group Management** window. See [Admintool](#). If some of the buttons are grayed out, it means that you need to select a group in the Group Management window.

Propriétés des Groupes

Lorsque nous créons ou modifions un groupe, nous avons accès à l'ensemble de ses propriétés :

Global

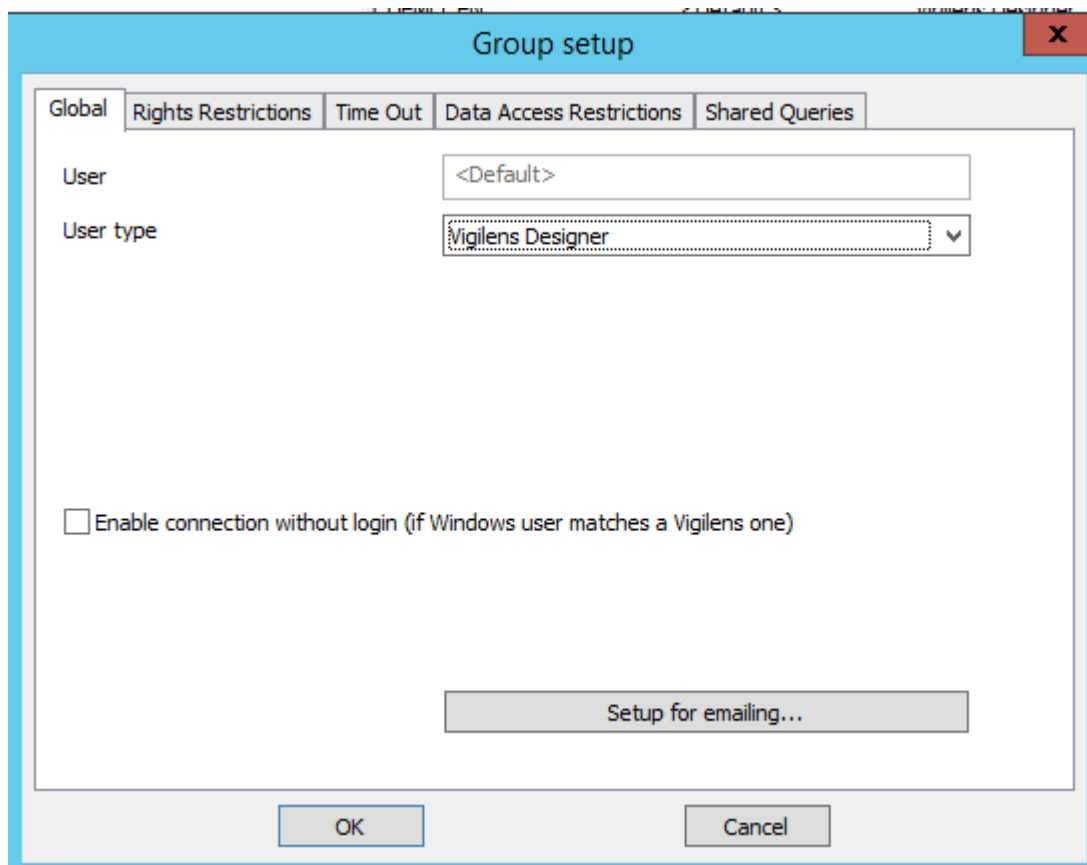

The screenshot shows a dialog box titled "Group setup" with a close button (X) in the top right corner. The dialog has five tabs: "Global", "Rights Restrictions", "Time Out", "Data Access Restrictions", and "Shared Queries". The "Global" tab is active. It contains the following fields and controls:

- User:** A text box containing "<Default>".
- User type:** A dropdown menu with "Vigilens Designer" selected.
- Enable connection without login (if Windows user matches a Vigilens one):** An unchecked checkbox.
- Setup for emailing...:** A button located below the checkbox.
- OK** and **Cancel** buttons are located at the bottom of the dialog.

Name

Name of the group, knowing that the default group cannot be renamed.

User type

there are 2 possible types of users.

- Vigilens Viewer / Web: only consultation of existing queries
- Vigilens Designer: possibility to create new queries.



The available types depend on the license.

Windows connexion

Allows to launch Vigilens without the login window being displayed, if the Windows user name corresponds to the Vigilens user name.

Setup for emailing

You can also assign a different mail server and/or a different sender name for this group than the default server.

The mail server can be set at the user level, in which case it takes precedence over what is set at the group level.



Specifying mail settings at the user level allows you to have a personalized return address.



Unchecking one or both checkboxes opens the entry to the parameters specific to this group.

Email Setup [X]

Use default server (smtp.office365.com)

SMTP

SMTP Server for outgoing mail

SMTP Server requires authentication

User Name

Password

SMTP Server Port

Default encryption

Encryption

None TLS SSL

Use default sender (support@vigilens.fr)

OK Cancel

Email Setup [X]

Use default server (smtp.office365.com)

Use default sender (support@vigilens.fr)


Sender

Sender address


Copy for sender

OK Cancel

Rights restriction

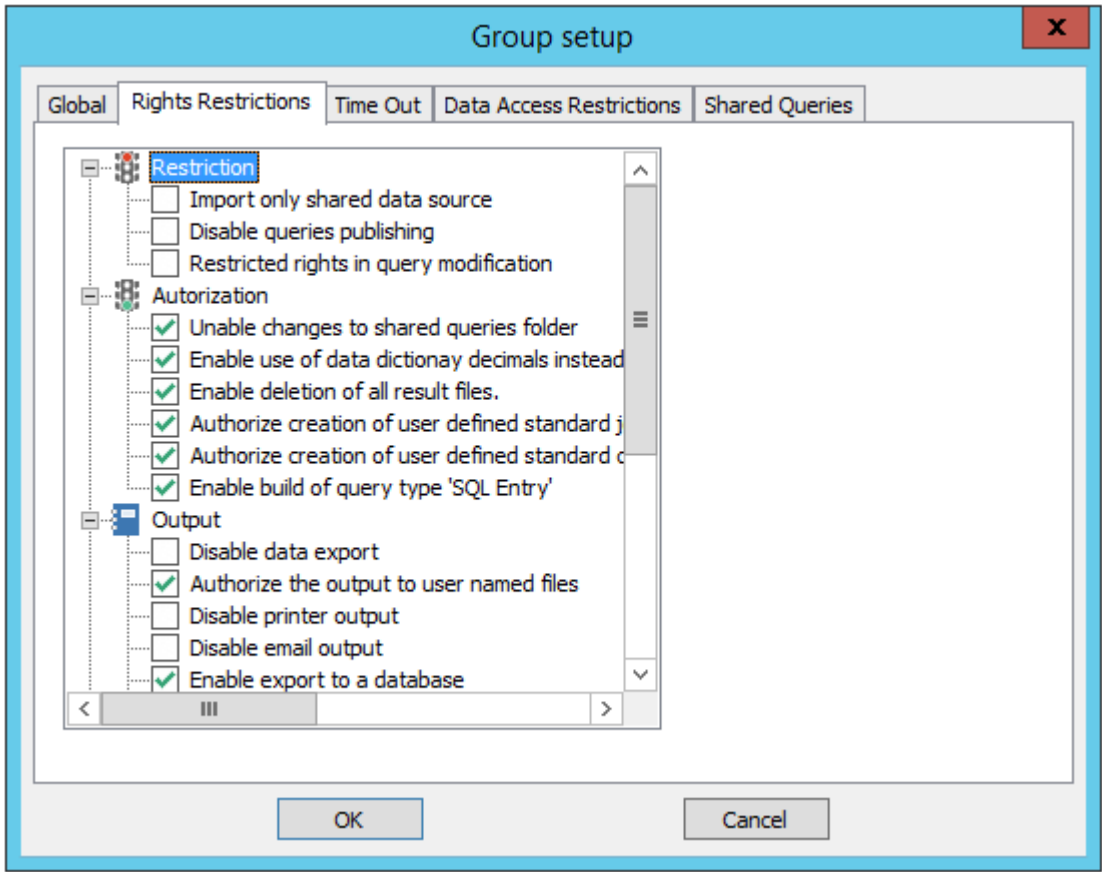

* This is where you define which Vigilens applications a group can access. You can see that for each right, there is a contextual help in the top right corner.

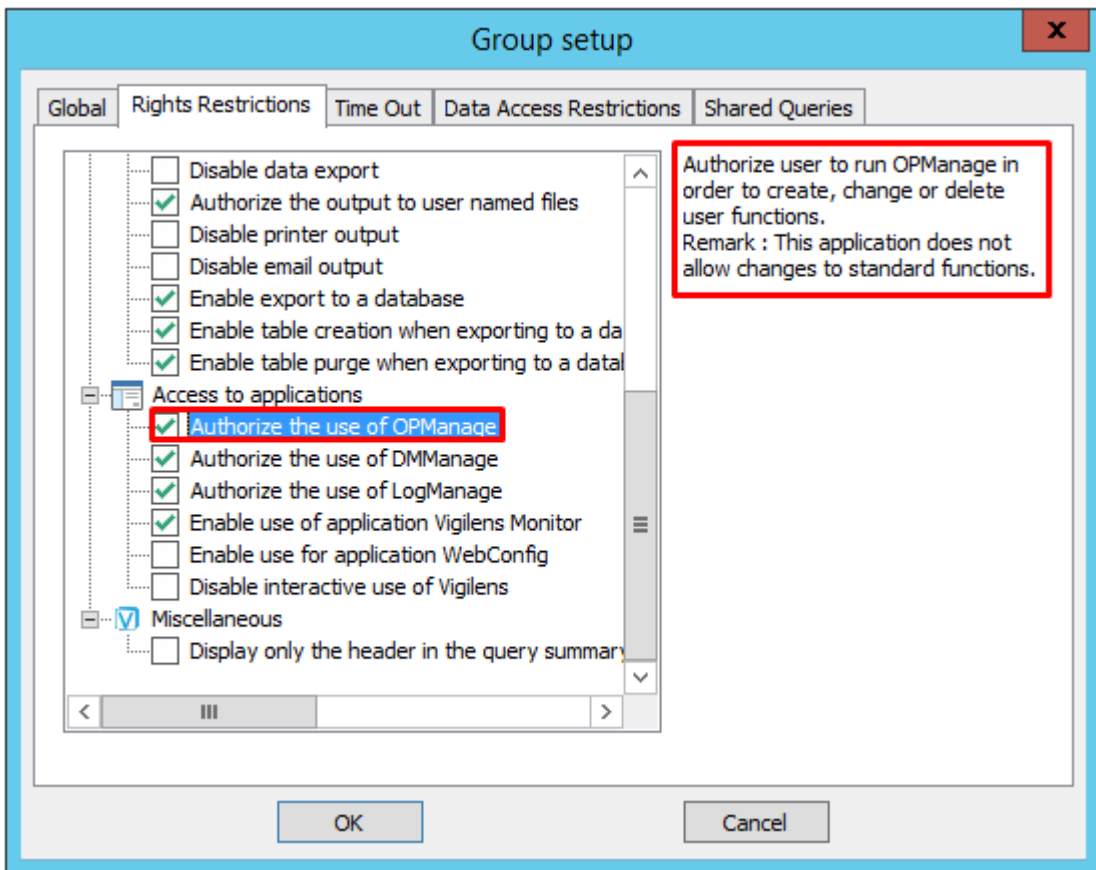



If one of these boxes is checked at the group level, it will also be checked at the group user level and will not be uncheckable.



recupérer les libellés en anglais de Denis

Time Out

The screenshot shows a 'Group setup' dialog box with a 'Time Out' tab selected. It contains two sections for configuring time limits. The first section, 'SQL run time out', has a checked 'Enable time out' checkbox and a time picker set to 0 h, 3', and 0". The second section, 'Total time out (SQL run + Data download and display)', also has a checked 'Enable time out' checkbox and a time picker set to 0 h, 4', and 0". At the bottom of the dialog are 'OK' and 'Cancel' buttons.

There are 2 times out:

- the first one is purely relative to the database: it is the maximum time between the submission by Vigilens of the request to the SQL server and the end of the execution. This time out is managed by the database itself.
- the second one is managed by Vigilens: compared to the first one, it also takes into account the data extraction time.



These notions of time-out can be defined at different levels:

- group
- user

- query




These times must necessarily be smaller and smaller when switching from group to user and then user to query.



Because SQL time out is managed at the database system level, it is not available on all platforms.

Data access restriction

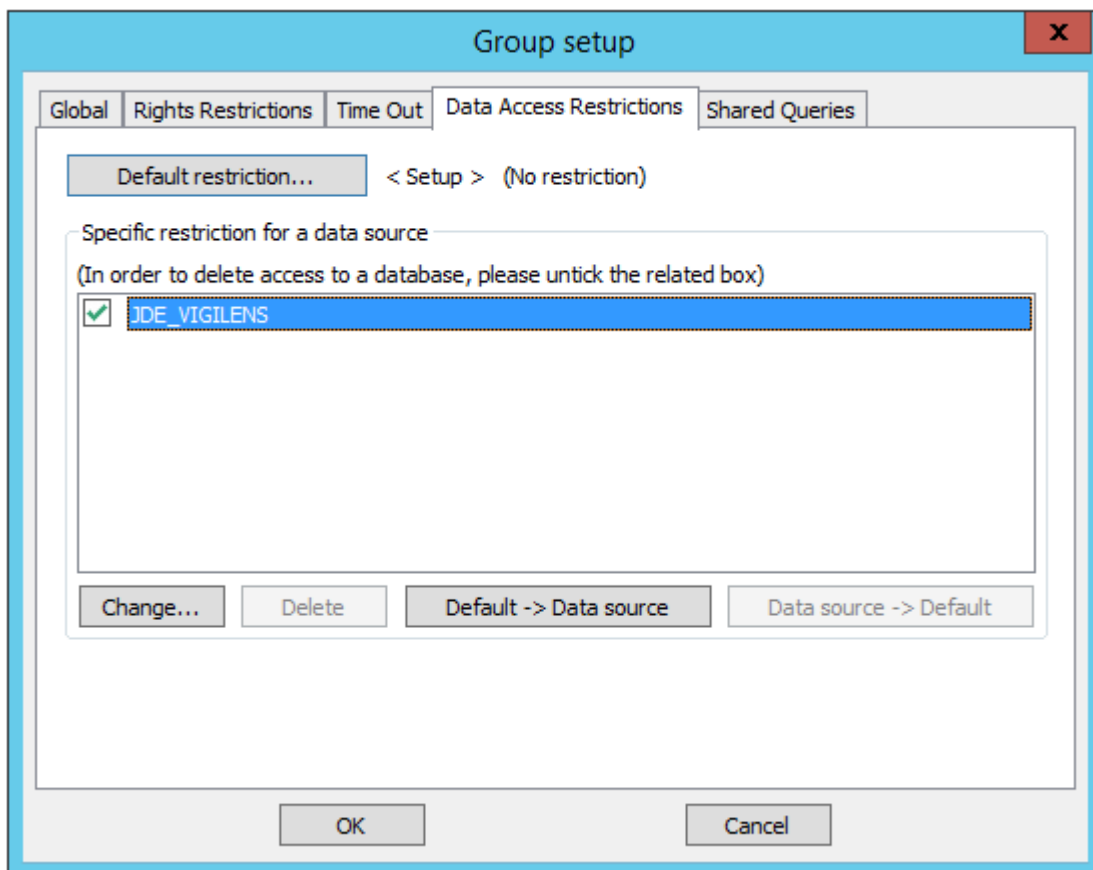

It may be useful to block certain groups from accessing certain sensitive company information. Vigilens can impose restrictions on :

- Environments
- Tables (for JDE/World type sources)
- Aliases (for JDE/World sources)
- Fields
- Values






The button Default restrictions... gives you access to settings that are valid for all data sources that do not have specific settings. The sequence of the screens is similar in every way to the settings for a particular data source.



Generally speaking, all of the following restrictions work on either as black list or white list system: either you make explicit which items are prohibited and everything else is allowed, or you make explicit which items are allowed and everything else is prohibited. Black list/White list operation is defined at group level and cannot be changed at user level.

you can:


- prevent/allow access to environments, for JDE/World data sources

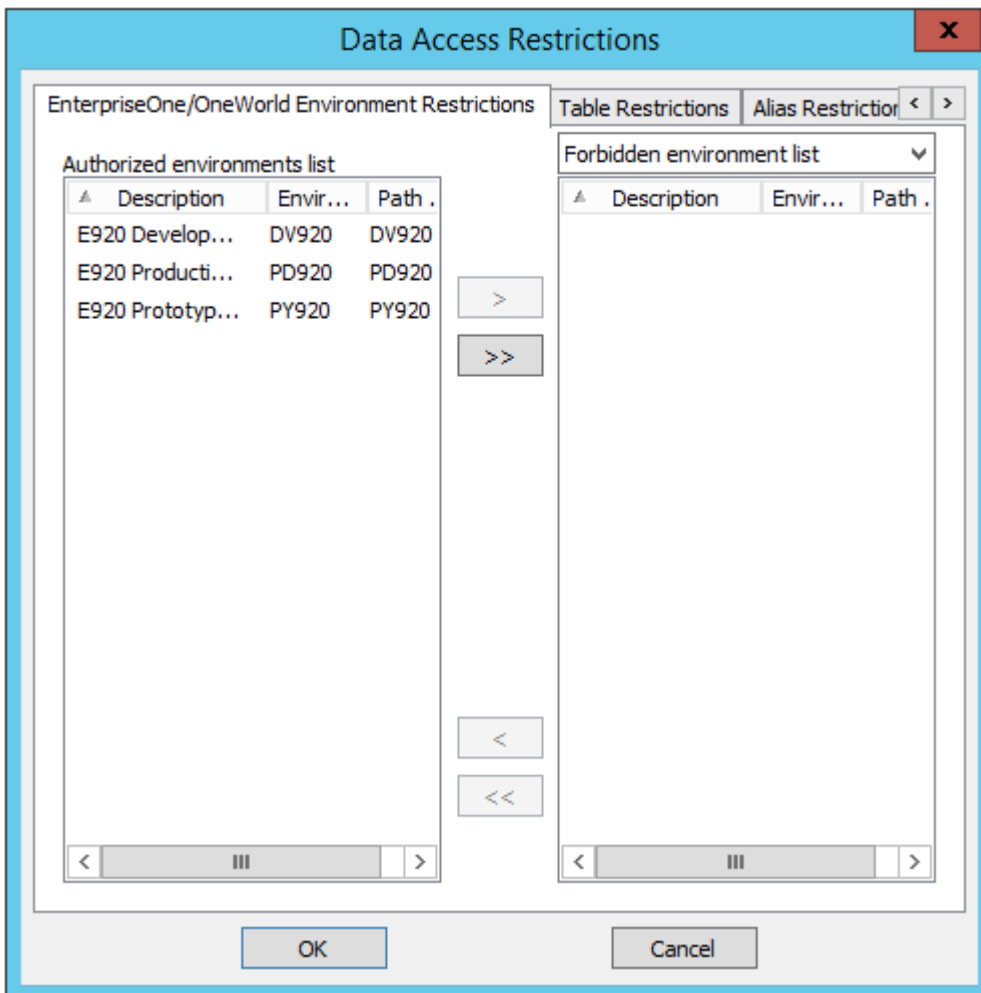


- prevent/allow consultation of a particular table



- prevent/allow access to an alias (JDE/World)

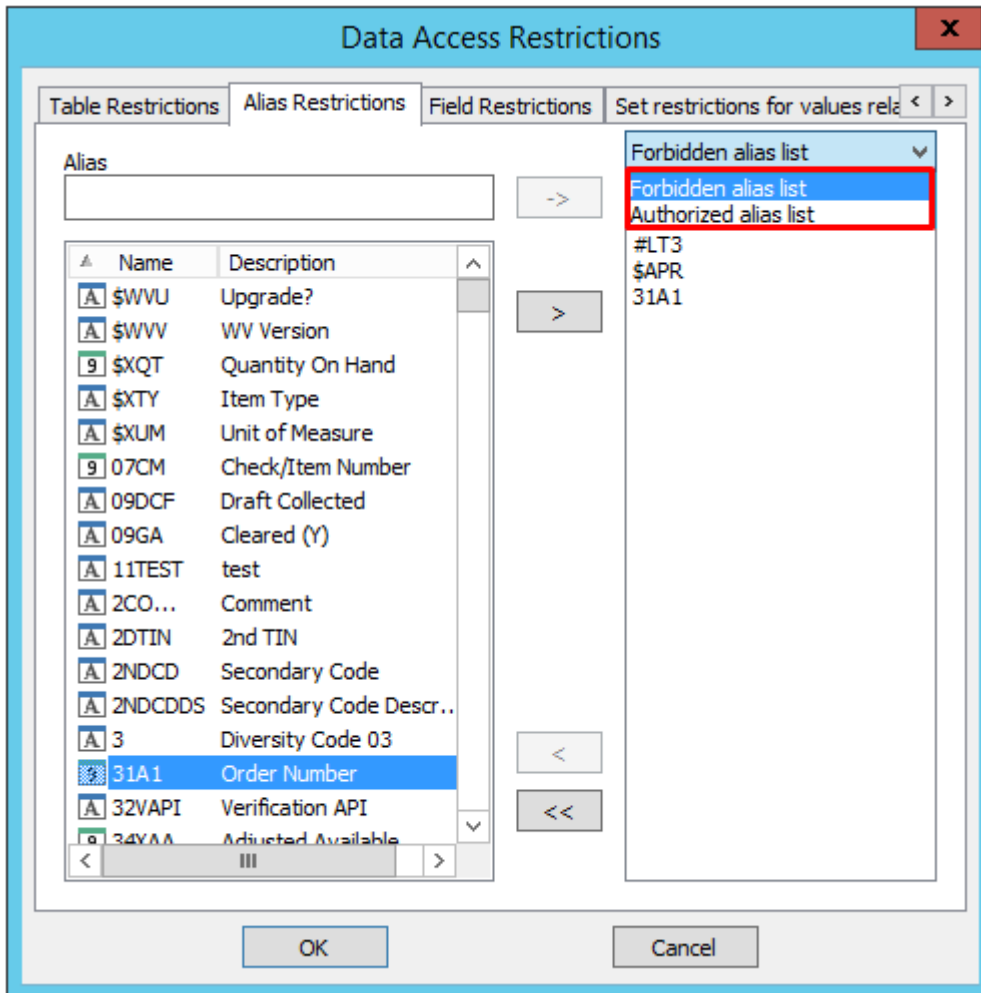

- prevent/allow access to define table column

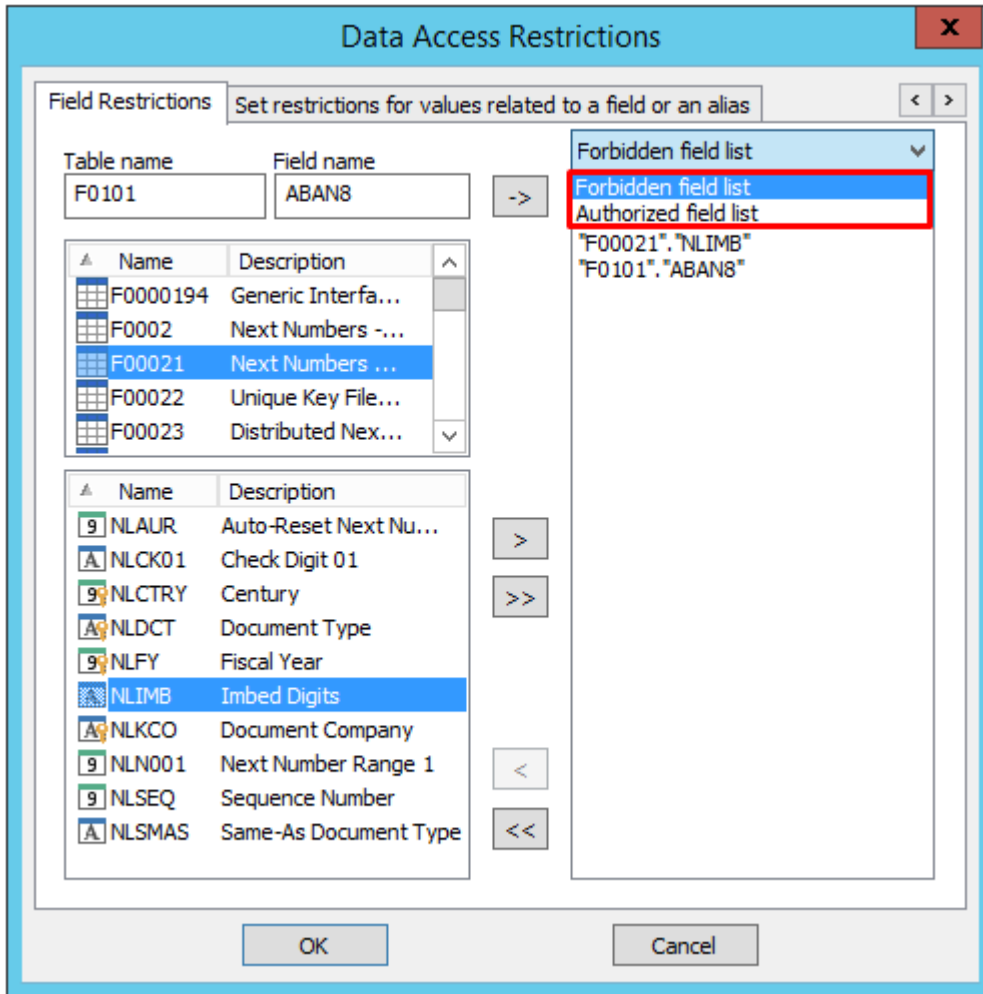

- prevent/allow the display of certain table rows according to criteria on a table column. The criterion can be a single value, a range of values, or a list of values.

The screenshot shows a 'Data Access Restrictions' dialog box with a 'Field Restrictions' tab. A red box highlights the 'Condition for forbidden data display' dropdown menu. A '+' icon is visible to the right of this dropdown. Below it, a 'Set a condition for a value related to a field or an alias' dialog is open. It has three radio buttons: 'Enter an alias', 'Enter a field', and 'Enter a field with wizard'. The 'Enter a field with wizard' option is selected. It contains two tables:


Name	Description
F0000194	Generic Interface Table ...
F0002	Next Numbers - Automatic
F00021	Next Numbers by Comp...
F00022	Unique Key File - Next A...
F00023	Distributed Next Number...
F0004	User Defined Code Types
F0004D	User Defined Codes - Alt...
F0005	User Defined Code Values
F0005D	User Defined Codes - Alt...

Name	Description
NNCK01	Check Digit 01
NNCK02	Check Digit 02
NNCK03	Check Digit 03
NNCK04	Check Digit 04
NNCK05	Check Digit 05
NNCK06	Check Digit 06
NNCK07	Check Digit 07
NNCK08	Check Digit 08

At the bottom, the 'Value for forbidden display' dropdown is set to 'Value equal to the following string :'. A red box highlights the '...' button next to it, which is currently set to '[F0002].[NNCK01] ='. A red arrow points from this button to a secondary dialog box titled '[F0002].[NNCK01]'. This secondary dialog has three tabs: 'Single value', 'Range of values', and 'List of values'. The 'Single value' tab is active, showing two input fields with the values '0' and '3'.




If the data source is JDE/World, we have in addition the choice to use the JDE security associated with a user and one of his roles (or all roles with the value “*ALL”).

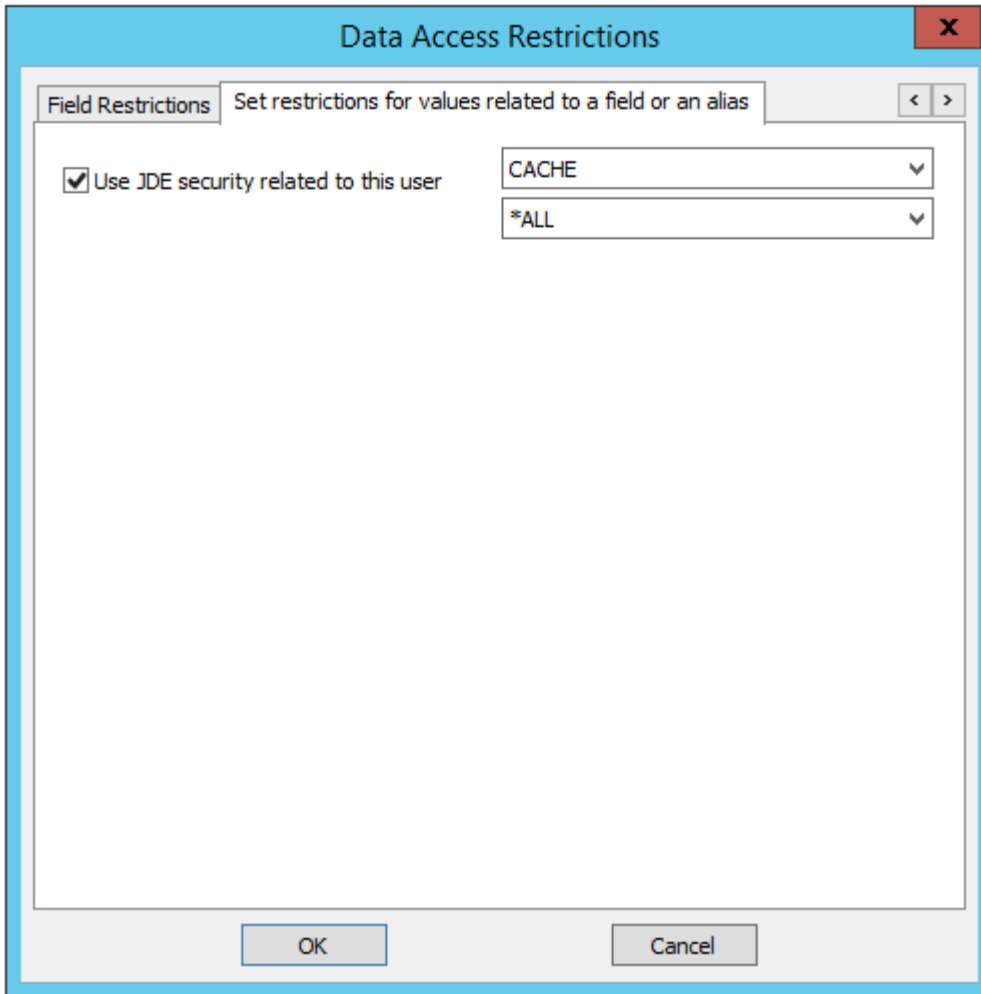

Shared Queries


This setting allows you to :


- Define the place(s) where the user can deposit the queries he wants to share. The user has access to the entire tree structure of the specified directories.
- Define the shared queries it can use

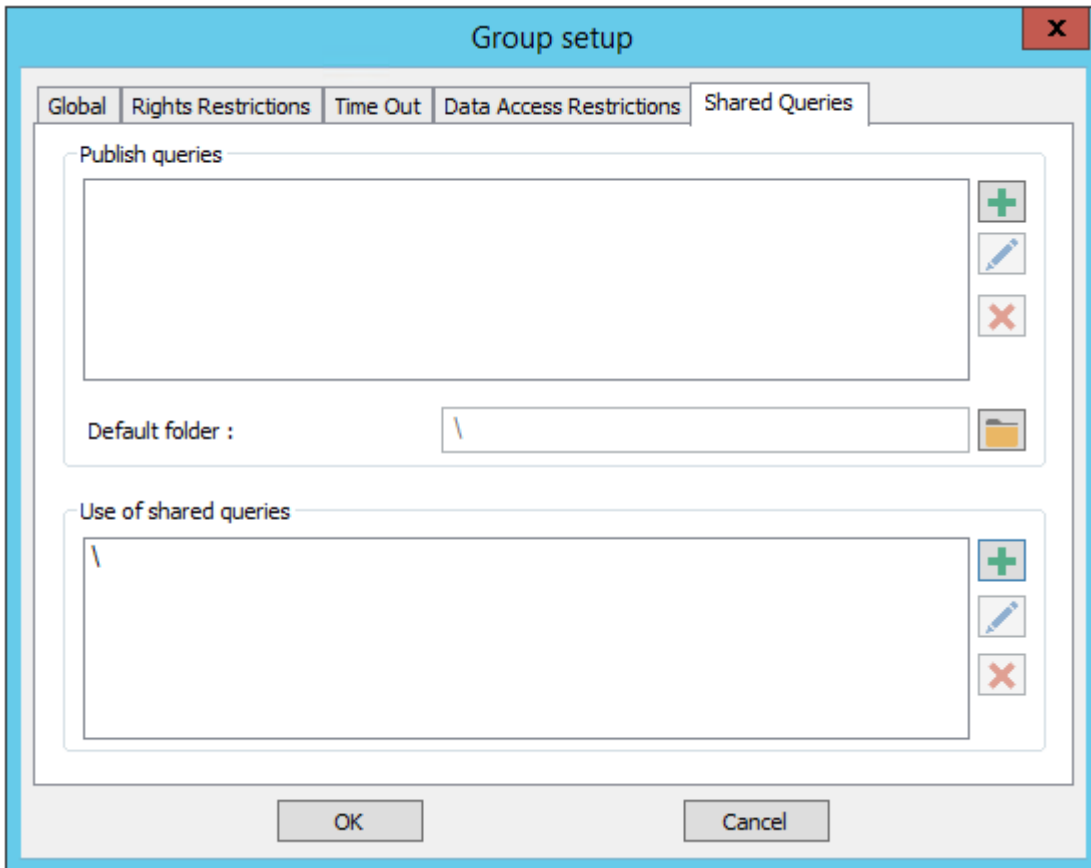

- Publish queries: list of shared folders accessible when publishing queries
 - Default folder: proposed by default when publishing queries
- Use of shared queries: list of shared folders accessible via the web interface

Change Language

 Change user language

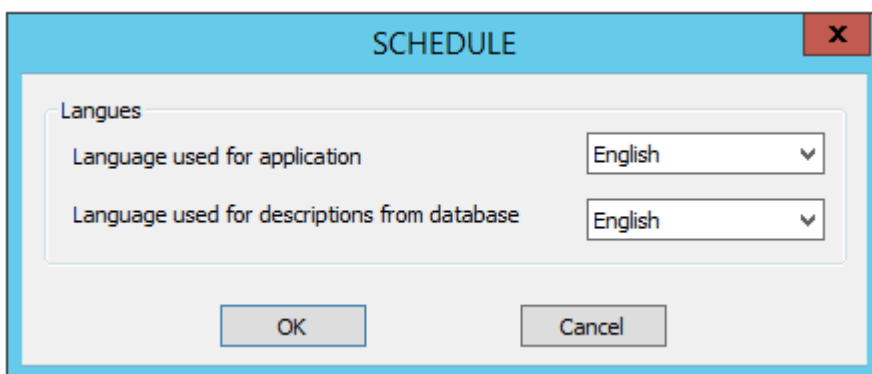

From: <https://vigilens.wiki/dokuwiki/> - **Vigilens Reporting Knowledge Garden**

Permanent link: https://vigilens.wiki/dokuwiki/doku.php?id=en:v8_0_0:admintool:menus:gestion:groupe:start&rev=1595935410

Last update: **2020/07/28 13:23**

