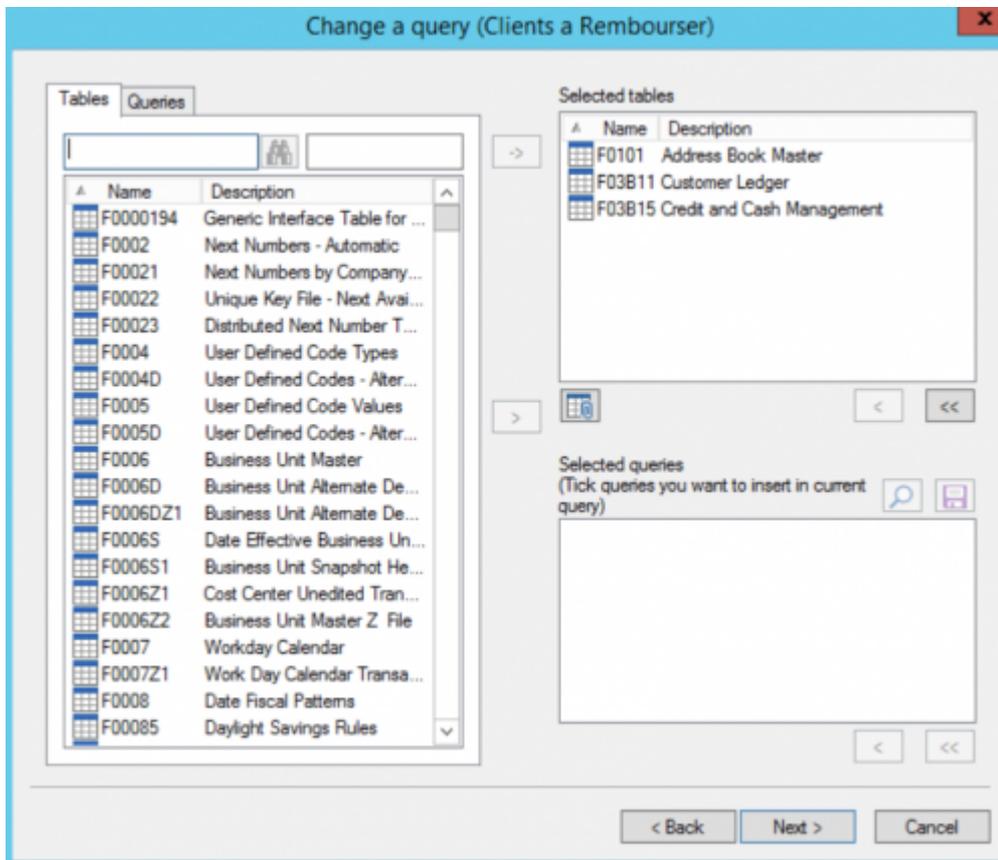# Table and subquery selection

Choice of tables

💡 The same table can be added several times. An index (_1, _2, _3…) allows distinguishing the different occurrences.
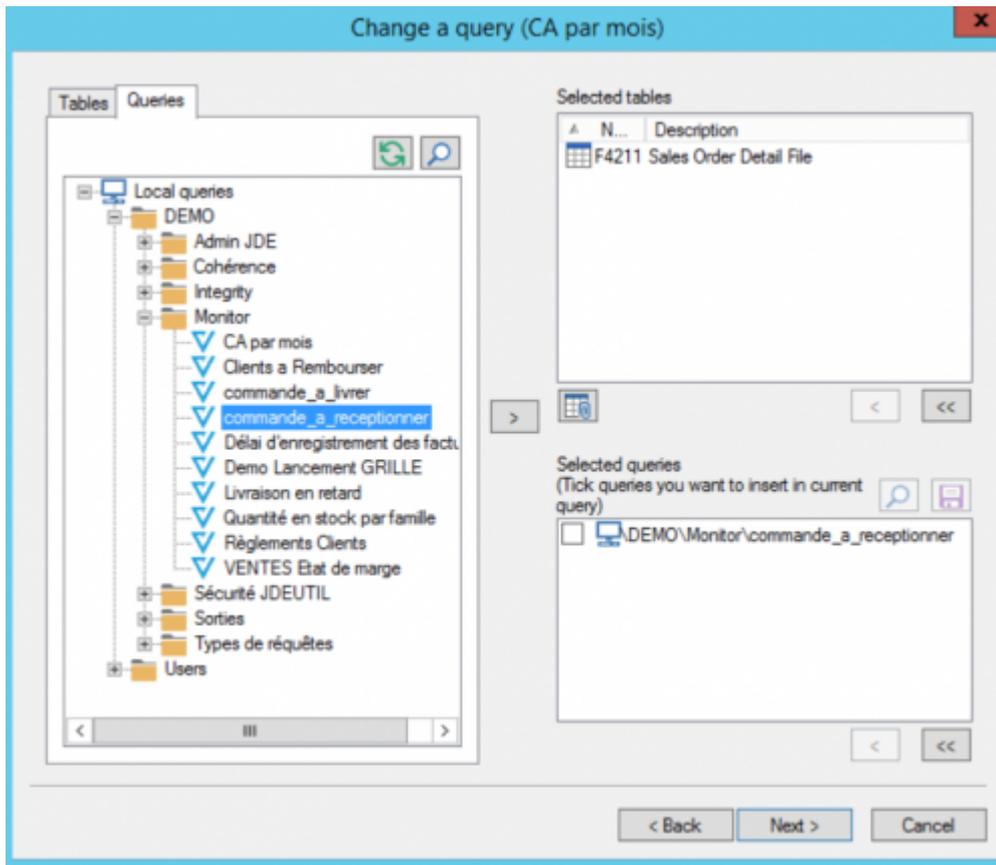
Ex:

You can also customize the Table Name by using the **F2 key**.
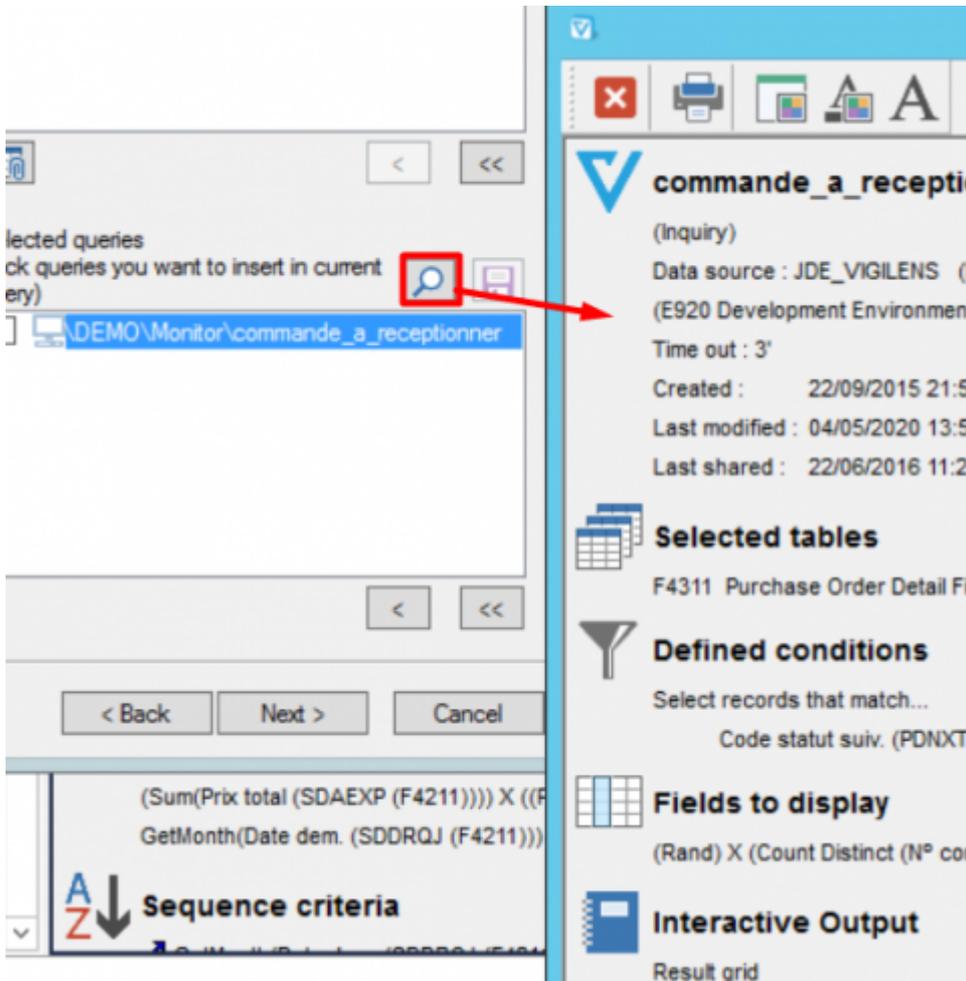
Selection of Queries

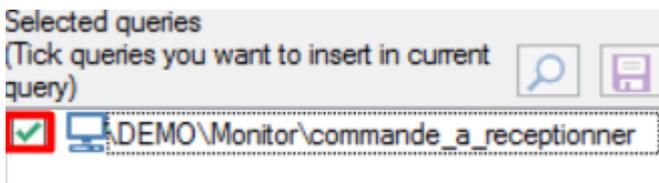> ⚠️ You can only add a subquery that :
>
> - if it relates to the same data source as the calling query.
> - if it is available in the user's directory.
>
> To use a published query as a subquery, you must create a copy of it in the user's folder.

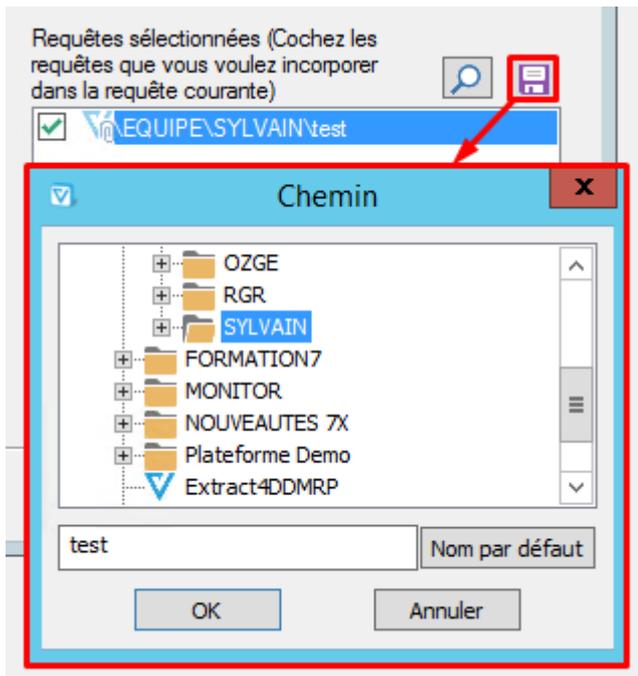The magnifying glass gives an overview of the request called :

If you check the box in front of the name of a subquery, it is **incorporated** into the query you are building: a **frozen copy** of the subquery called is stored in the query you are building.
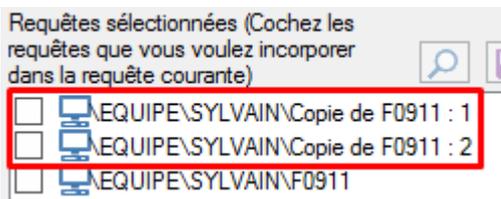

If you leave the checkbox unchecked, you keep a dynamic link with the query called.

⚠️ The publication of a query necessarily incorporates subqueries.

When a query is embedded, it can be extracted into the user's directory.

You can add the same subquery several times. An index (:1, :2, :3…) allows us to distinguish the different occurrences.